



## TURBO MH SERIES CHIP CONVEYOR

### FILTERING CHIP CONVEYOR

Self-cleaning filtration down to 250 and 500 Microns

The Turbo MH Series will handle any type of chip material and any chip geometry all while providing filtered coolant to keep the machine tank clear of chips.

Mixed Materials  
Coarse or Stringy Chips  
All Sizes Mixed

Aluminum  
Fine Chips  
Coarse and Stringy



YOUR "ONE-STOP-SHOP"  
FOR MACHINE-TOOL PERIPHERALS

## Benefits of the

### Turbo MH filtration conveyor

- Reduced maintenance to machine coolant tank
- Extended coolant life
- Improves coolant pump life
- Enables lights out operation
- Improved coolant quality to the cutting area
- Reduced machine down time
- Reduced non productive labor costs

## Additional benefits of the

### Turbo MH Series


- Self cleaning filtration
- Very small footprint (same as a standard conveyor)
- Flexible design for various flow rates
- Handles any chip shape (long and small)
- Handles any material
- Attractive price
- Fits to most standard machine coolant tanks
- Robust construction
- Filtration can be upgraded through retrofit at anytime
- Single drive for reduced energy consumption



## Example of return on investment

	Standard Hinge Conveyor	Turbo MH500	Turbo MH250
Machine tool tank clean outs per year	8	4	1
Cost of replacement coolant per clean out	\$220	\$220	\$220
Machine down time per clean out	4 hours	4 hours	4 hours
Labor cost per clean out (4 hours)	\$200	\$200	\$200
Cost of lost production per clean out (4 hours)	\$230	\$230	\$230
Total cost per year	\$5,200	\$2,600	\$650
Total machine down time per year	32 hours	16 hours	4 hours

## Typical tank clean out schedule

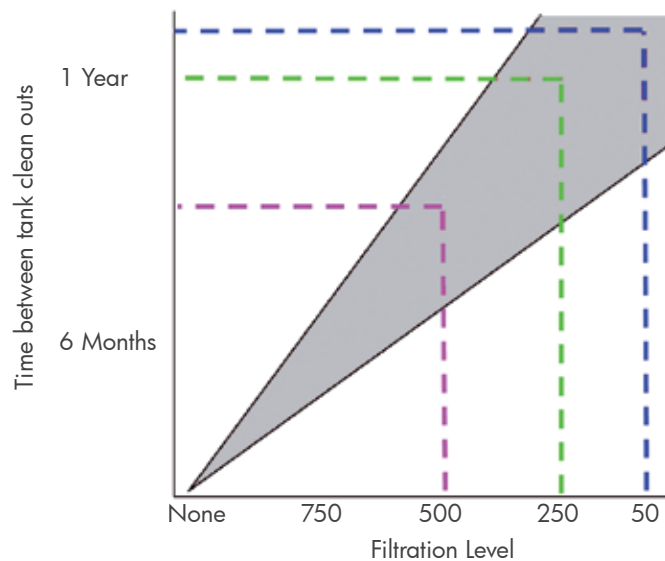

## Compatible for numerous machines

Many of today's machine designs have tight spaces in which the conveyor needs to fit. To introduce filtration systems to these machines is often either not possible or results in large bulky solutions that utilize a lot of precious floor space. The low profile frame design and integrated filtering system means the floor space required is often no larger than a standard conveyor.

## Designed for production efficiency

Today's machining operations are becoming more and more complex since various operations are carried out on the same machine. Standard conveyors are often not versatile enough to handle the different types of chips produced. Where high investment in filtering systems cannot be justified the MH series provides an excellent alternative.

The Turbo MH series conveyor design provides an excellent method of removing large stringy chips as well as small broken chips in a medium to light chip load. The low conveyor investment makes this an ideal choice for small lathes, turning centers, machining centers and drilling and tapping machining centers. Materials like aluminum, brass and cast iron are ideal applications.



## LNS Eco solutions

LNS's focus on reducing environmental impacts through reduced energy consumption has led to a single drive motor to power the conveyor and provide the self cleaning filter function ensuring maximum efficiency. In addition to the reduced power consumption, the self cleaning filtration helps maximize the coolant life, reducing the frequency of coolant tank clean outs and thus reducing the disposal costs of hazardous coolant liquids. Back flush pumps are not required providing further savings in energy costs.



## Coolant flow and filtration

The coolant flow rates used in modern machine tools vary greatly from machine to machine but the design flexibility of the Turbo MH Series means that it can handle most applications.


Each filter box is automatically cleaned during normal conveyor operation. Coolant flow and optimal filtration is assured. As the design of the Turbo MH Series allows the number of filter boxes used to be matched to the requirements of the machine tool's maximum flow rate.



## Reliable operation

Conveyors work in a tough environment. For over 3 decades, LNS has learned the best ways to design conveyors for dependable, reliable operation.


Each belt has a minimum of 2 wiper cleats that clean chips that have washed into the inside of the conveyor frame. Because all conveyor transitions use a smooth radius, these wipers do an excellent job of keeping the frame free of chips, reducing the risk of a belt jam. All belt rollers, tail disks, and curved track are hardened for durability.

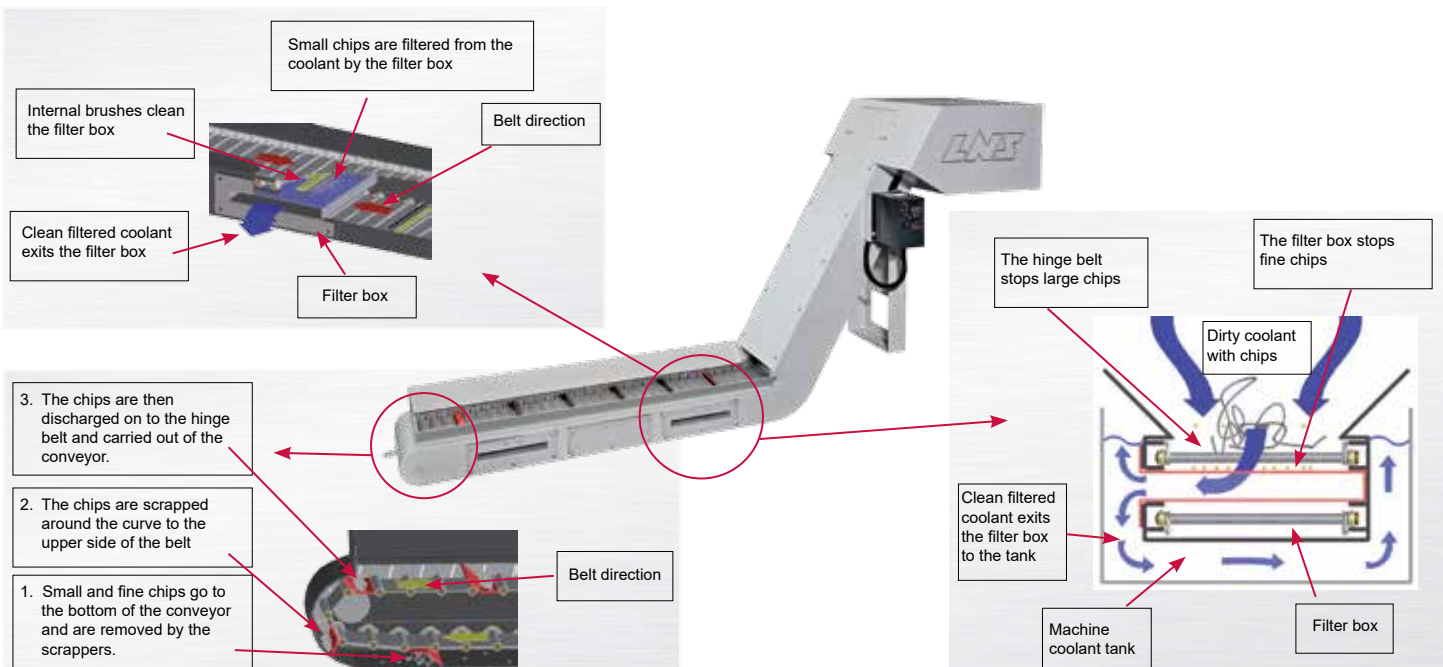



# TURBO MH SERIES CHIP CONVEYOR

## SYSTEM SCHEMATIC

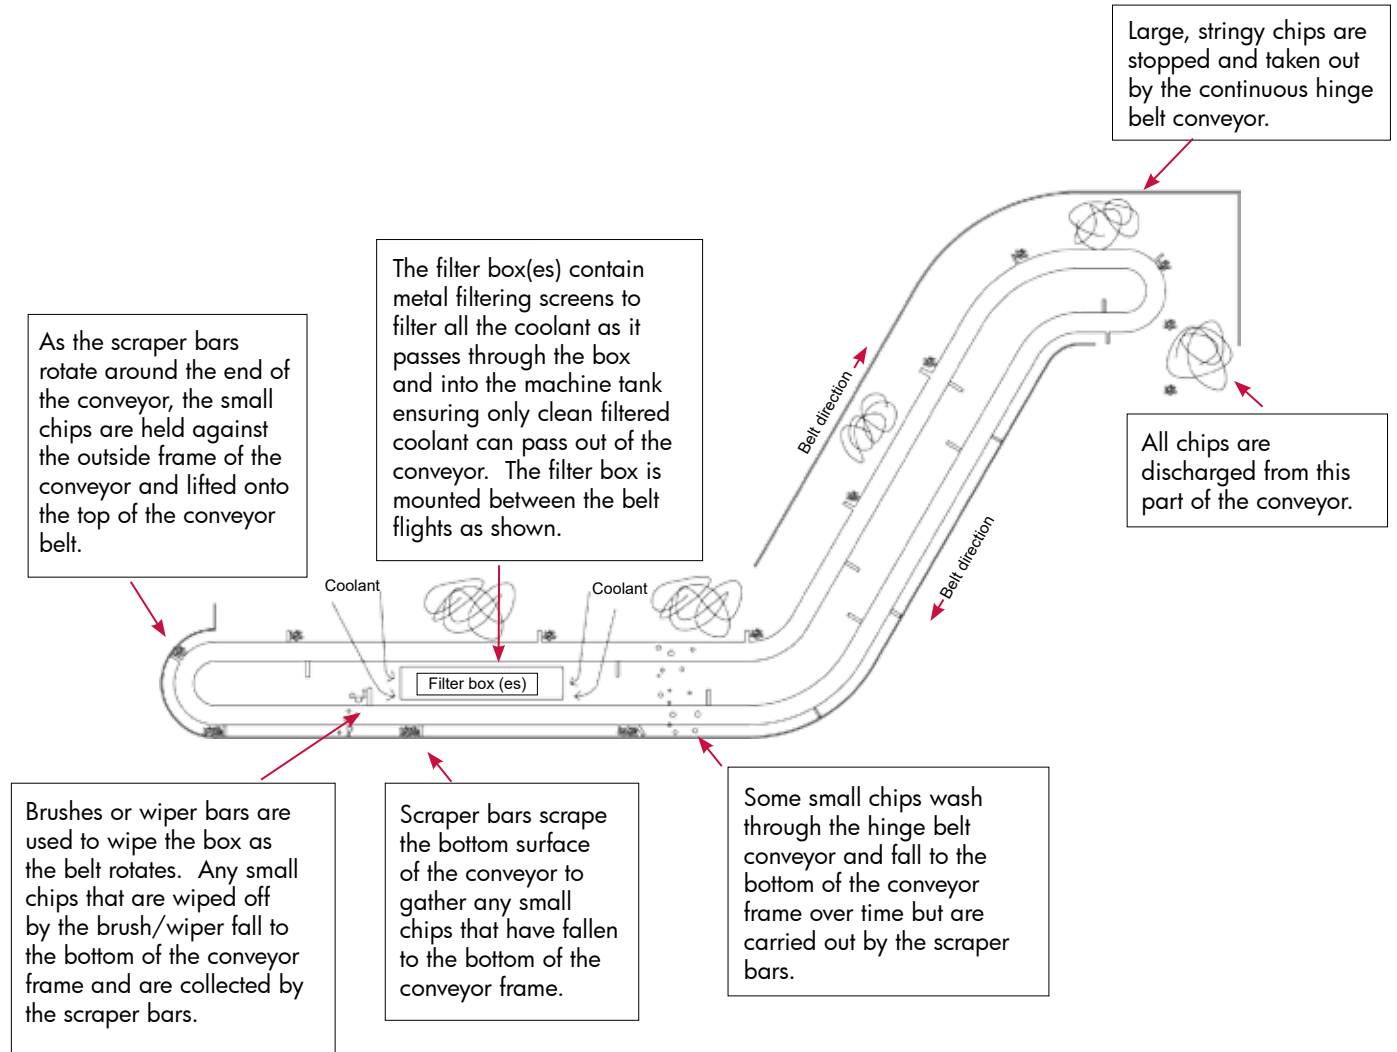

### YOUR "ONE-STOP-SHOP" FOR MACHINE-TOOL PERIPHERALS

LNS provides a full range of barfeeders, chip conveyors, coolant management systems, air filtration systems, and workholding systems that is second to none on the market. We are known in the industry for the solid experience we have gained over several decades in an exceptionally wide range of applications, our excellent customer service, and our technical support. This support is ensured by highly qualified technicians who are available throughout North America.



LNS America  
4621 East Tech Drive  
Cincinnati, Ohio 45245

513-528-5674  
Sales@LNS-america.com  
www.LNS-america.com



LNS America, Inc.  
ISO 9001-10013185  
LNS Turbo  
ISO 9001-10000276  
Facilities covered by this mark have been evaluated to international quality assurance standards by UL QCS Inc.