



## Rebel 102 Servo SE

The Rebel 102 Servo SE is a compact bar loading system for CNC lathes. With a large magazine capacity allowing for long unattended operation, the Rebel combines the advantages of auto bar loading with a small footprint and an economical price.



# Rebel 102 Servo SE

The Rebel 102 Servo SE is an automatic Bar Loading Magazine for processing bars in the diameter range of 8 - 102mm and in lengths up to 1520mm (5') on CNC lathes.

## Conversational Programming

- User friendly software delivers fast set-up on easier jobs and powerful advanced features for more sophisticated demands.
- **Sub-spindle mode** allowing you to "feed-on-the-fly" using your lathe's sub-spindle.
- **Return & wait mode** which slashes 30% of bar change time from the load cycle by staging the next bar while the lathe is still cycling.
- **Fixed piece feedout** eliminates the need for a stock stop by allowing you to program a feedout value.
- **(Optional) shaft loading** provides an efficient, off-the-shelf loading system for higher production shaft jobs. Rebel 102 SA



## Conversational Control Features State-of-the-Art Touch Screen and Menu Driven Programming

Control stores up to 36 part programs

## Programmable Bar Diameter & Part Length

The operator simply enters the bar diameter and part length, the Rebel will automatically adjust the parameters for loading, feedout, and bar change.

## Feed Force

Feed Force automatically set by the controller after the bar diameter is entered into the user-friendly touch screen control.

## Remote Control Axis Jog

Using the control pendant, the operator can choose either forward or reverse pusher travel while the Rebel is in manual mode.



## Linear Feed & Servo Drive

The bar stock is loaded into the main spindle of the lathe by a linear feed mechanism with a toothed belt and servomotor. This allows for the feeding of the bar stock into position without the use of a fixed bar stop.



## All Electric Operation

The Rebel 102 SE runs entirely on electricity, no shop air required.



## Bar Stock Length

Load bar stock lengths in a range of 6" to 60". Maximum stock length cannot exceed length of the headstock plus the chucking package.



## Axial Shift

The axial shift allows for maintenance access to the back of the lathe spindle. The Axial Track is standard in X axis. Z axis is optional. Please specify axis style at the placement of the order.



## Free Of Noise And Vibration

The rotating stock does not come in contact with the loading magazine allowing high speed machining, especially in hex, square, or profiled stock.

## Spindle Liner Access

Spindle liners sized to bar stock diameter support the rotating bar allowing maximum RPM.



## Spindle Liner Storage

Includes storage for (3) Spindle Liners under magazine



## Extra Large Magazine

Magazine storage capacity is 760mm (30")

## Soft Load

The magazine incline is adjustable enabling the loader to "soft load" large diameter bars.



## Technical Data

- **Center Line Height**  
950mm (38") - 1350mm (53.1")
- **Bar Diameter**  
8mm (.315") - 102mm (4.015")
- **Bar Length**  
152mm (6") - 1520mm (60")\*
- **Rapid Return Rate**  
1300mm/sec. (4'/sec.)
- **Bar Change Time**  
Approx. 20 seconds
- **Operating Voltage**  
Electric supply 230V (60HZ)
- **Bar Pushers**  
10mm dia. Hardened steel  
19mm dia. Hardened steel
- **Weight**  
1100 lbs.


## Options Available

- Z axial shift device
- Lathe spindle liners
- 6mm diameter bar pusher kit
- Magazine extension rack
- Special Application Shaft Load (Rebel 102 SA)


## Specifications

<b>Bar Size</b>	8mm (.315") - 102mm (4.02")
<b>Rack Capacity</b>	760mm (30") deep
<b>Bar Length</b>	152mm (6") - 1520mm (60")
<b>X &amp; Z Axial Track Travel</b>	X Axis = 650mm Z Axis = 600mm

## Configuration

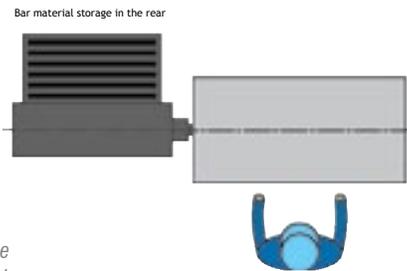

\*The maximum bar length must not exceed the measured length from front of chuck jaw/collet to rear of headstock guard.

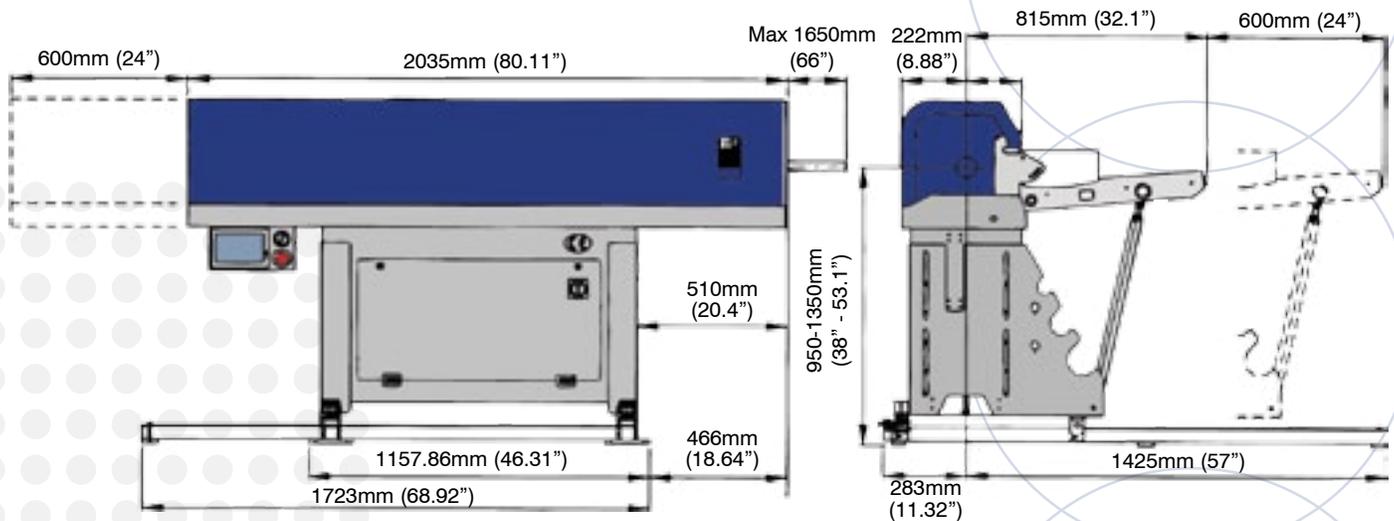

Technical data subject to change without notice

## EDGE TECHNOLOGIES

11600 ADIE ROAD MARYLAND HEIGHTS, MO 63043

314.692.8388 ○ f 314.692.5152 ○ www.edgetechnologies.com